


Conical Poles

D Base diameter: **Ø200**

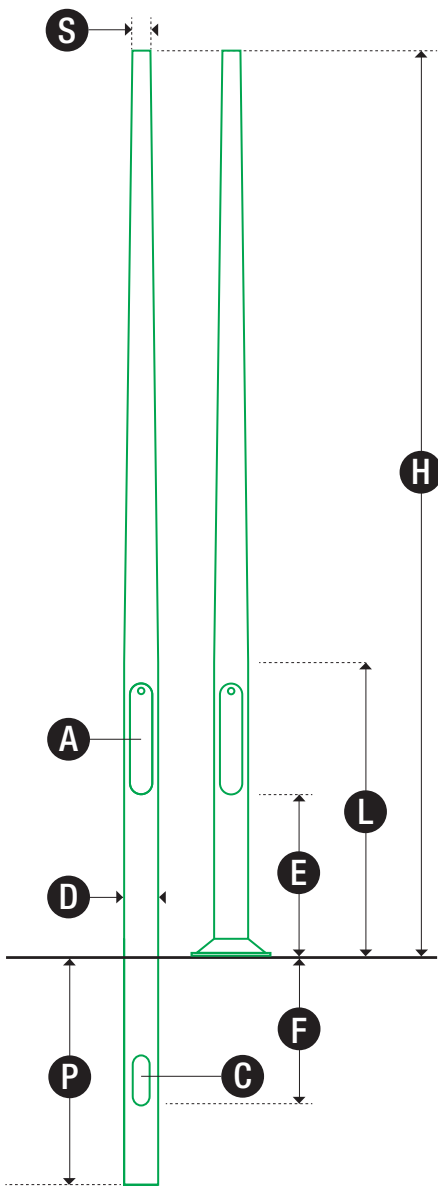

Description:

Base diameter: Ø200
 Spigot diameter: Ø76 or Ø90
 Height range: 10 to 12 m
 Pole material: Aluminium 6063-T6
 Reinforced column: Aluminium 6063-T6

Designed per requirements of EN40 standards.

** Due to the topography differences per region, kindly get in touch with us with the details of the location to provide you with an accurate static report.*



S Spigot diameter: **Ø76**

H	FLANGED				PLANTED				
	Pole Height* [m]	Pole Code	Weight* [kg]	Straight Length [m]	Flange Code**	Pole Code	Weight* [kg]	Straight Length [m]	Planting Depth [m]
10	PAFK.D200		73,9	2,8	F0903B	PABK.D200	79,8	2,8	1,5
11			84	3,8	F1003B		88,1	3,8	1,6
12			92,3	4,8	F1003B		107,2	4,8	1,7

S Spigot diameter: **Ø90**

H	FLANGED				PLANTED				
	Pole Height* [m]	Pole Code	Weight* [kg]	Straight Length [m]	Flange Code**	Pole Code	Weight* [kg]	Straight Length [m]	Planting Depth [m]
10	PAFK.D200		76	2,8	F0903B	PABK.D200	81,9	2,8	1,5
11			86,1	3,8	F1003B		92,6	3,8	1,6
12			94,3	4,8	F1003B		109,2	4,8	1,7

** Total weight of unpainted pole with the given flange (FOXXB) without additional accessories.*

*** Refer to page 86-87 for flange and anchorage details.*

T Wall thickness [mm]: **4.7**


A Access door [mm]: **400*100**

E Opening position [mm]: **500**

C Cable entry door [mm]: **150*75**

F Cable entry position [mm]: **500**

F0903B



F01003B

