


Conical Poles

D Base diameter: **Ø114**

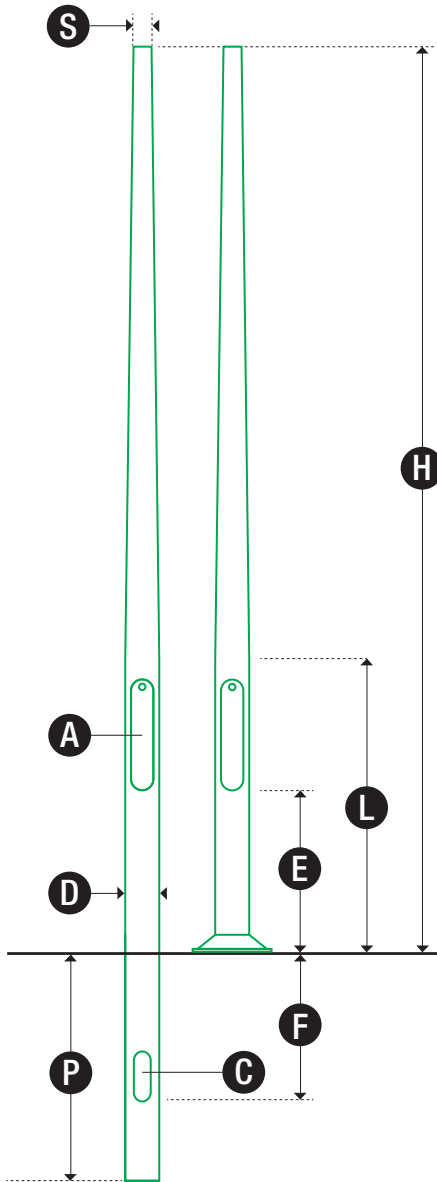


Description:

Base diameter: Ø114
 Spigot diameter: Ø60 or Ø76
 Height range: 3 to 5 m
 Pole material: Aluminium 6063-T6
 Reinforced column: Aluminium 6063-T6

Designed per requirements of EN40 standards.

** Due to the topography differences per region, kindly get in touch with us with the details of the location to provide you with an accurate static report.*

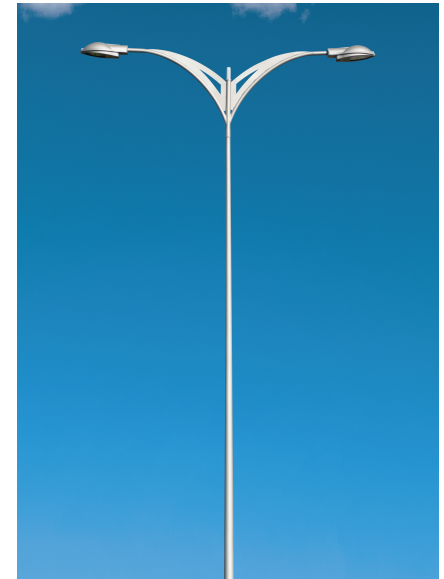

S Spigot diameter: **Ø60**

H	FLANGED				PLANTED				
	Pole Height [m]	Pole Code	Weight* [kg]	Straight Length [m]	Flange Code**	Pole Code	Weight* [kg]	Straight Length [m]	Planting Depth [m]
3	PAFK.D114		12,7	1,8	F0301B	PABK.D114	12,7	1,8	0,6
4			14,8	1,8	F0303B		14,7	1,8	0,8
5			17,3	1,8	F0401B		16,8	1,8	0,8

S Spigot diameter: **Ø76**

H	FLANGED				PLANTED				
	Pole Height [m]	Pole Code	Weight* [kg]	Straight Length [m]	Flange Code**	Pole Code	Weight* [kg]	Straight Length [m]	Planting Depth [m]
3	PAFK.D114		13	1,8	F0301B	PABK.D114	12,8	1,8	0,6
4			15,2	1,8	F0303B		15,1	1,8	0,8
5			17,9	1,8	F0401B		17,4	1,8	0,8

** Total weight of unpainted pole with the given flange (FOXXXB) without additional accessories.*

*** Refer to page 86-87 for flange and anchorage details.*

- T** Wall thickness [mm]: 3
- A** Access door [mm]: 400*85
- E** Opening position [mm]: 500
- C** Cable entry door [mm]: 150*75
- F** Cable entry position [mm]: 500

