

Conical Poles

D Base diameter: **Ø148**




Description:

Base diameter: Ø148
 Spigot diameter: Ø60 or Ø76
 Height range: 6 to 8 m
 Pole material: Aluminium 6063-T6
 Reinforced column: Aluminium 6063-T6

Designed per requirements of EN40 standards.

** Due to the topography differences per region, kindly get in touch with us with the details of the location to provide you with an accurate static report.*

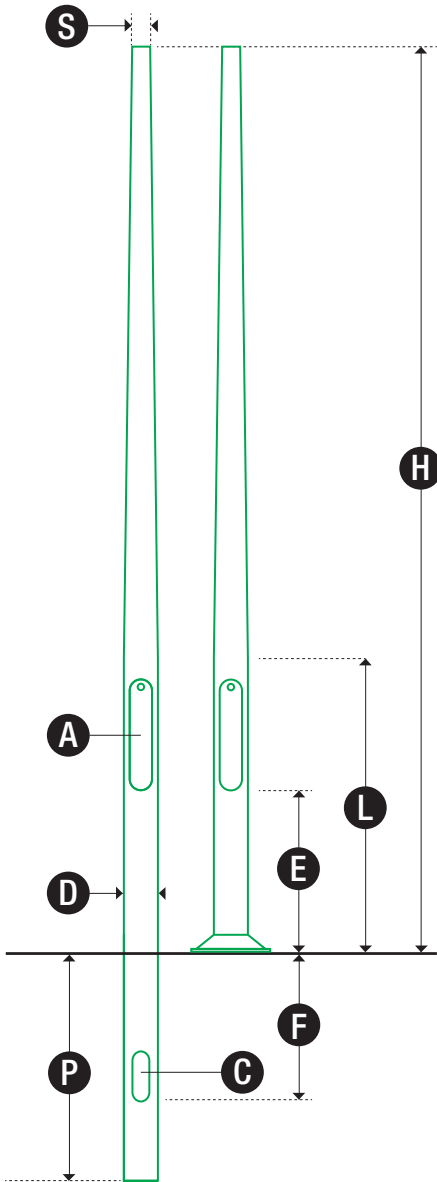

S Spigot diameter: **Ø60**

H	FLANGED				PLANTED			
	Pole Code	Weight* [kg]	Straight Length [m]	Flange Code**	Pole Code	Weight* [kg]	Straight Length [m]	Planting Depth [m]
6	PAFK.D148	24,4	1,8	F0603B	PABK.D148	24,5	1,8	1,0
7		28,8	1,8	F0702B		29,2	1,8	1,2
8		30,3	1,8	F0702B		30,3	1,8	1,2


S Spigot diameter: **Ø76**

H	FLANGED				PLANTED			
	Pole Code	Weight* [kg]	Straight Length [m]	Flange Code**	Pole Code	Weight* [kg]	Straight Length [m]	Planting Depth [m]
6	PAFK.D148	25,3	1,8	F0603B	PABK.D148	25,3	1,8	1,0
7		27,8	1,8	F0702B		28	1,8	1,2
8		31,5	1,8	F0702B		31,5	1,8	1,2

** Total weight of unpainted pole with the given flange (FOXXXB) without additional accessories.
 ** Refer to page 86-87 for flange and anchorage details.*

- T** Wall thickness [mm]: 3
- A** Access door [mm]: 400*90
- E** Opening position [mm]: 500
- C** Cable entry door [mm]: 150*75
- F** Cable entry position [mm]: 500

F0603B



F0702B

