

Flag Poles


D Base diameter: **Ø165**

Description:

Base diameter: Ø165
 Spigot diameter: Ø76 or Ø90
 Height range: 9 to 10 m
 Pole material: Aluminium 6063-T6
 Reinforced column: Aluminium 6063-T6

Designed per requirements of EN40 standards.

** Due to the topography differences per region, kindly get in touch with us with the details of the location to provide you with an accurate static report.*

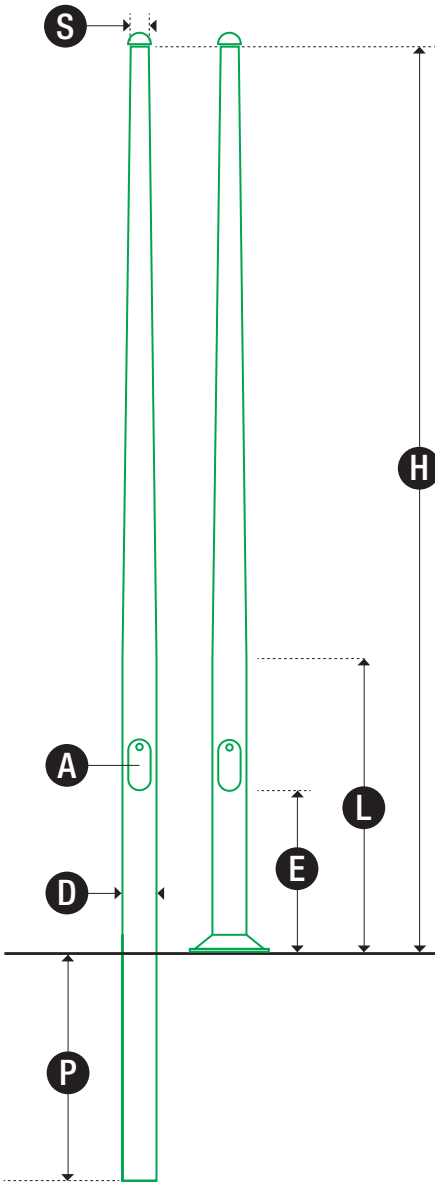

S Spigot diameter: **Ø76**

H	FLANGED				PLANTED			
	Pole Code	Weight* [kg]	Straight Length [m]	Flange Code**	Pole Code	Weight* [kg]	Straight Length [m]	Planting Depth [m]
9	PAFF.D165	38,3	1,8	F0801	PABF.D165	37,4	1,8	1,2
10		30,7	2,8	F0801		30,7	2,8	1,0

S Spigot diameter: **Ø90**

H	FLANGED				PLANTED			
	Pole Code	Weight* [kg]	Straight Length [m]	Flange Code**	Pole Code	Weight* [kg]	Straight Length [m]	Planting Depth [m]
9	PAFF.D165	39,5	1,8	F0801	PABF.D165	38,7	1,8	1,2
10		31,6	2,8	F0801		31,6	2,8	1,0

** Total weight of unpainted pole with the given flange (F0XXXB) without additional accessories.
 ** Refer to page 86-87 for flange and anchorage details.*

- T** Wall thickness [mm]: 3
- A** Access door [mm]: 200*120
- E** Opening position [mm]: 750

F0801B

